


## Line Impedance Stabilization Networks / Artificial Mains Network MIL 461 E/F, Single line 25 A to 1500 A

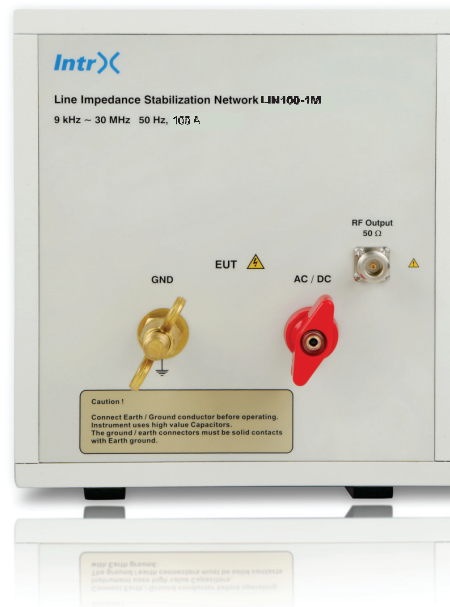

LISN (Artificial Mains Network) is a low-pass filter typically placed between an AC or DC power source and the EUT (Equipment Under Test) to create a known impedance as per complying standard for the measurement of conducted emission. It also isolates the unwanted RF signals from the power source with pre-filter included. It provides a Radio frequency (RF) noise measurement port.

LISN is used to predict conducted emission for diagnostic, pre-compliance and compliance testing.

Scientific designs and manufactures models in compliance with CISPR 16-1-2, EN, FCC (ANSI C63.4), ETS, VCCI and VDE, MIL461E/F standards and automotive for measurements in commonly used Standards.

These single line LISN are designed in accordance with MIL 461E/F, DO160 requirements. Characteristic impedance of these LISNs is  $(50\mu\text{H} + 5\Omega) \parallel 50\Omega$

A transient limiter is highly recommended to use with LISN at the front end of EMI Rx or Spectrum Analyzer to protect measuring instrument from transients.

# Technical Specifications

Model	LIN25-1M	LIN100-1M	LIN200-1M	LIN400-1M	LIN1500-1M
Frequency Range	150 kHz (9 kHz) – 30 MHz				
Maximum Load Current					
Continuous Current	25A	100A	200 A	400 A	1500 A
Peak Current (15 min)	30 A	120 A	225 A	425 A	1600 A
Maximum Input Voltage					
DC	600 V				
AC	300 V @ 50/60 Hz 130 V @ 440 Hz, 250 V @ 440 Hz (Optional)				
AMN Impedance	(50 $\mu$ H + 5 $\Omega$ )    50 $\Omega$ $\pm$ 20%				
DC Resistance	< 10 m $\Omega$				< 2 m $\Omega$
Standard Reference	CISPR16-1-2/25, MIL461E/F, ISO 7637-2 Transients, BCI, DO-160				
RF Output Connector	N Type (F) Connector				
Mains Input & Output Terminals (EUT)	Wing Terminal, Optional : Supercon				Bus Bar with M12 Nut Bolts


## Standard Accessories:

- ▮ 50 $\Omega$ , 2W Termination
- ▮ N to N Cable 2 m
- ▮ N to BNC Adapter
- ▮ Manufacturer's Calibration Certificate


## Optional Accessories:

- ▮ Transient Limiter : -10dB
- ▮ Transient Limiter : -20dB
- ▮ Calibration Report traceable to ISO 17025

Voltage division factor (Attenuation)  
EUT to RF Connector

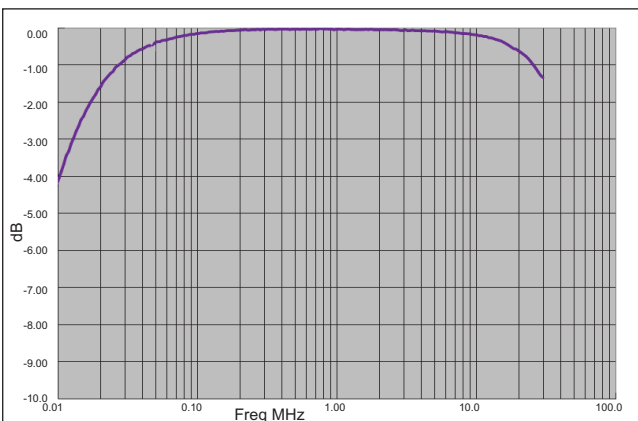

Impedance curve Terminal EUT RF  
connector terminated

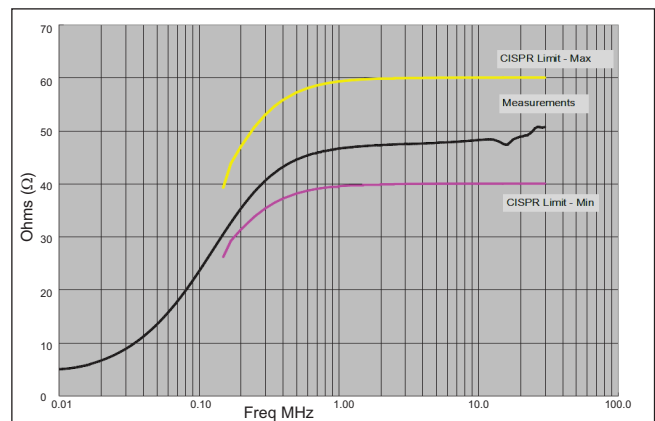

(Subject to Change)



**Scientific Mes-Technik Pvt. Ltd.**

B-14, Pologround, Industrial Estate, Indore 452 015, India

+91-731-2422330 /31 /32 /33    +91-731-2422334, 2561641    info@intrxglobal.com    www.intrxglobal.com

